


Thermo-Couple Products Co.

REPLACEMENT ELEMENTS

Series 5504A

- Bare Wire Element with Ceramic Insulators
- May Be Used as a Replacement Thermocouple Element in Existing Thermowells and Protection Tubes.
- The Units are Available in All Calibrations and Meet Standard or Special Limits of Error (Special Limits of Error Must Be Specified).
- Platinum Calibrations Available in 25 Gauge Conductors Only.

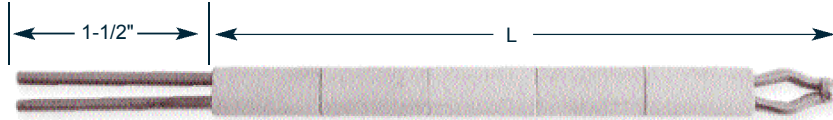

Enter a selection for each item, please fax your inquiry to TCP.

Example: 5504A - - - -

5504A - - - -

CODE	WIRE CALIBRATION
J	Iron/Constantan
K	Chromel/Alumel
T	Copper/ Constantan
E	Chromel/Constantan
R	Plat. 13% Rhod./Plat.
S	Plat. 10% Rhod./Plat.
B	Plat. 30% Rhod./Plat. 6% Rhod.

For duplex calibrations, please indicate double letters, example EE.

CODE	OTHER PERTINENT DATA
0	NONE
999	Special Request Consult Factory


LENGTH "L"
Specify in inches 01 to 99

CODE	WIRE GAUGE SIZE
8	8 Gauge
14	14 Gauge
20	20 Gauge
25	25 Gauge

25 Gauge can only specify R, S or B.
Consult factory for other sizes.

Series 5504B

- May Be Used as a Replacement Thermocouple Element in Existing Thermowells and Protection Tubes.
- These Units are Available in All Calibrations and Meet Standard or Special Limit of Error (Special Limits of Error Must Be Specified)

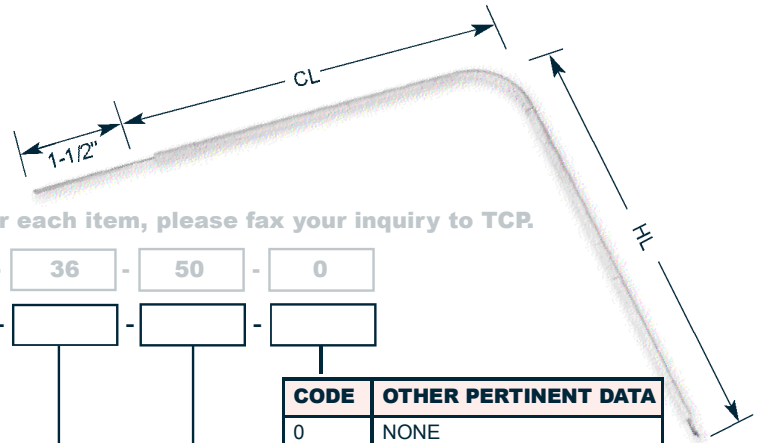

Enter a selection for each item, please fax your inquiry to TCP.

Example: 5504B - - - - -

5504B - - - - -

CODE	WIRE CALIBRATION
J	Iron/Constantan
K	Chromel/Alumel
T	Copper/ Constantan
E	Chromel/Constantan

Consult factory for other calibrations

CODE	WIRE GAUGE SIZE
8	8 gauge
14	14 gauge
20	20 gauge

Consult factory for other sizes

CODE	OTHER PERTINENT DATA
0	NONE
999	Special Request Consult Factory

COLD LEG "CL"
Specify in inches 01 to 99

HOT LEG "HL"
Specify in inches 01 to 99