




Thermo-Couple Products Co.

UNIVERSAL THERMOCOUPLE

Series 5528

- Adjustable Immersion Stainless Steel Flex-Hose Acts as a Spring
- Commonly Used for Injection Molding, Heated Dies, Platens, Pipelines and Others.
- Stainless Steel Construction Rated for 800°F (425°C)
- Thermocouple Conductors are Insulated with Fiberglass Braid Inside and .281" Diameter Stainless Steel Flexhose Outside
- Sheath Diameter .187"
- Grounded Junction

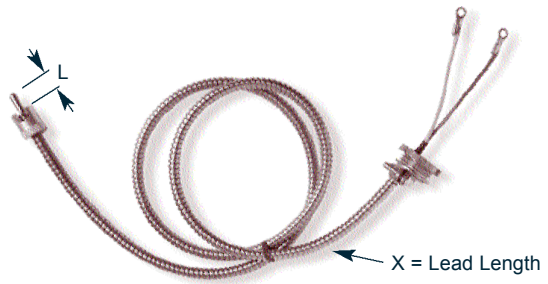

Enter a selection for each item, please fax your inquiry to TCP.

Example: 5528 - - - - -


5528 - - - - -

CODE	WIRE CALIBRATION
J	Iron/Constantan
K	Chromel/Alumel
T	Copper/ Constantan
E	Chromel/Constantan
Consult factory for other calibrations	
IMMERSION LENGTH "L"	
.50	1/2" (standard)
Consult factory for other lengths	
LEAD LENGTH "X"	
36	36"
Consult factory for other lengths	

CODE	OTHER PERTINENT DATA
0	NONE
999	Special Request Consult Factory
CODE	TERMINATION STYLE
10	111 Standard Plug
20	131 Mini Plug
41	3" Pig-Tail #6 Ring Terminal, 1/2" BX Connector
Code 10 - 111 plug is standard	
Consult factory for other options	

Series 5529

- Adjustable Immersion Using 12 inch Long Spring.
- Commonly Used for Injection Molding, Heated Dies, Platens, Pipelines and Others.
- Stainless Steel Construction Rated for 800°F (425°C)
- Thermocouple Conductors are Insulated with Fiberglass Braid and Stainless Steel Overbraid
- Sheath Diameter .187"
- Grounded Junction

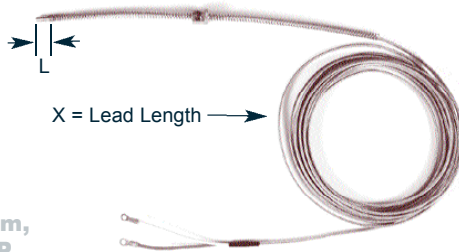

Enter a selection for each item, please fax your inquiry to TCP.

Example: 5529 - - - - -

5529 - - - - -

CODE	WIRE CALIBRATION
J	Iron/Constantan
K	Chromel/Alumel
T	Copper/ Constantan
E	Chromel/Constantan
Consult factory for other calibrations	
IMMERSION LENGTH "L"	
.50	1/2" (standard)
Consult factory for other lengths	
LEAD LENGTH "X"	
36	36"
Consult factory for other lengths	

CODE	OTHER PERTINENT DATA
0	NONE
999	Special Request Consult Factory
CODE	TERMINATION STYLE
10	111 Standard Plug
20	131 Mini Plug
42	3" Pig-Tail #6 Ring Terminal
Code 42 - 3" Pig-Tail is standard	