




Thermo-Couple Products Co.

# MINIATURE HEAD THERMOCOUPLE

## Series 900

- Supplied with a Lightweight Miniature Screw-Cover Head
- Waterproof Cover Available
- High Strength Bendable Design
- Mineral Insulation enables Thermocouples to be used at Higher Temperatures.
- See page 23 for maximum temperature.

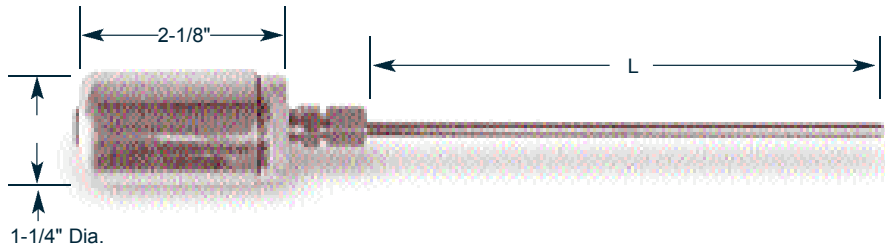

Enter a selection for each item, please fax your inquiry to TCP.

Example: 900 - J - D - 6 - W2 - 316 - 50 - 0

900 - [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ]

CODE	WIRE CALIBRATION
J	Iron/Constantan
K	Chromel/Alumel
T	Copper/ Constantan
E	Chromel/Constantan
R	Plat. 13% Rhod./Plat.
S	Plat. 10% Rhod./Plat.
B	Plat. 30% Rhod./Plat. 6% Rhod.

For duplex calibrations please indicate double letters, example EE.

CODE	SHEATH DIAMETER
C	.062"
D	.125"
E	.187"
F	.250"

Consult factory for other diameters

IMMERSION LENGTH "L"
Specify in inches 01 to 99 (6 inch increments standard). For lengths over 99 inches consult factory.

CODE	JUNCTION STYLE
W1	Grounded Flat Tip
W2	Grounded Rounded Tip
W3	Ungrounded Flat Tip
W4	Ungrounded Rounded Tip
W5	Exposed

Code W2 is standard

CODE	OTHER PERTINENT DATA
0	NONE
999	Special Request Consult Factory

CODE	TERMINATION STYLE
50	Dust Cover
51	Waterproof Cover

Dust Cover is standard

CODE	SHEATH MATERIAL
304	304 Stainless Steel
316	316 Stainless Steel
600	Inconel 600

Consult factory for other material

**Metric Orders Welcome**

Place an **mm** in the appropriate selection box:

100 mm

Mineral Insulated